

# N.C. THINNER

N.C Thinner for coatings used for wood master, especially nitrocellulose based products.



## PRODUCT BENEFITS



**FAST DRYING**



**CLEANING & DEGREASING**



**EXCELLENT SOLUBILITY**

## PRODUCT FEATURES

### WASHABILITY



✓ **BEST IN CLASS**  
HIGH  
MEDIUM  
LOW

### AVAILABLE PACKS



### PREPARATION REQUIRED



Pre-primed and smooth surface. Ensure that surface is clean, dry and clean from grease, oil and other contamination. Wood should be properly sanded and must be scuffed in the direction of wood grains. Seal with N.C Putty or Maestro Putty.



Thoroughly clean surface. Remove all defective or poorly adhering material by rubbing down using a suitable abrasive paper and dust off. Seal with N.C Sealer.


### FINISH



### TECHNICAL INFORMATION

- Coverage  
120-140 sq.ft per Litre
- Application  
Use as a Thinning Agent
- Drying Time  
2-3 hours between coats
- No of Coats  
1

### SPREADING RATE

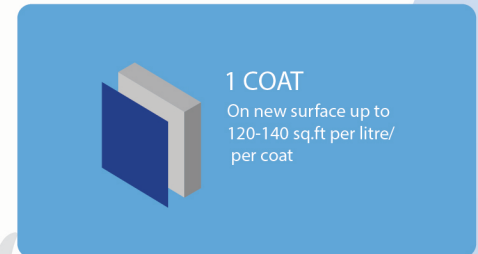

### SAFETY & ENVIRONMENTAL NOTES

Keep away from ignition sources because it is flammable. You must wear eye protection while applying paint. Always keep container air tight close. It must be kept out of children's reach. In case of contact with eyes, wash with brimful cup of water and immediately approach doctor. Always manage container to keep it in upright position. Protect it from extreme temperatures. Please do not empty into drain and water sources. Use of mask is advisable while rubbing down and same is true when applying by spray never breath vapor / spray. In case ventilation is insufficient the use of proper respiratory equipment is advised.