

N.C SEALER

N.C Sealer is a protective nitrocellulose based quick drying sanding sealer. It provides smooth and excellent base to top coat application.



PRODUCT BENEFITS



FAST DRYING



SMOOTH FILLING



BUBBLE FREE SURFACE



LEAD FREE



SUPREME QUALITY

PRODUCT FEATURES

WASHABILITY



✓ BEST IN CLASS
HIGH
MEDIUM
LOW

AVAILABLE PACKS



PREPARATION REQUIRED



Pre-primed and smooth surface. Ensure that surface is clean, dry and clean from grease, oil and other contamination. Wood or Metal should be properly sanded and must be scuffed in the direction of wood grains.



Thoroughly clean surface. Remove all defective or poorly adhering material by rubbing down using a suitable abrasive paper and dust off.


FINISH



TECHNICAL INFORMATION

- Coverage
120-140 sq.ft per Litre
- Application
Spray Gun
- Thinner
N.C Thinner
- Drying Time
1-2 hours between coats
- No of Coats
2-3
- Cleaning
Clean all equipment with Thinner

SPREADING RATE

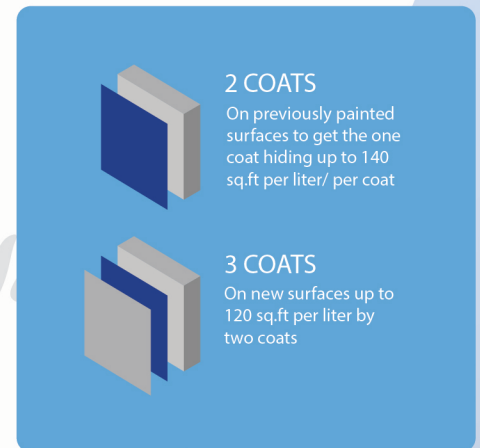

SAFETY & ENVIRONMENTAL NOTES

Keep away from ignition sources because it is flammable. You must wear eye protection while applying paint. Always keep container air tight close. It must be kept out of children's reach. In case of contact with eyes, wash with brimful cup of water and immediately approach doctor. Always manage container to keep it in upright position. Protect it from extreme temperatures. Please do not empty into drain and water sources. Use of mask is advisable while rubbing down and same is true when applying by spray never breath vapor / spray. In case ventilation is insufficient the use of proper respiratory equipment is advised.