

**POWDER COATING**

**MASTER EPOXY POWDER COATING**

Best for corrosive-free durability.



**PRODUCT BENEFITS**



WIDE RANGE




EXCELLENT GLOSS



CHEMICAL RESISTANT




MECHANICAL DURABILITY



VOCs FREE


**PRODUCT FEATURES**

**WASHABILITY**



✓ BEST IN CLASS  
HIGH  
MEDIUM  
LOW

**FINISH**

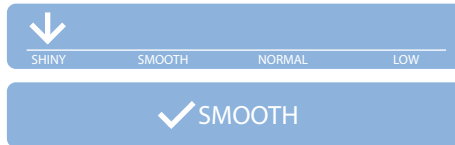

**AVAILABLE PACKS**



20 KG

**TECHNICAL INFORMATION**

- Gloss  
20 to 95 @ 60°
- Colour  
No Restrictions
- Relative Humidity  
60%
- Drying Time  
10 min
- Pencil Hardness Test  
H – 2H Pencil
- Adhesion  
Cross-cut rating Gt0
- Resistance to neutral salt spray  
No Blistering
- Temperature  
200 °C

**PREPARATION REQUIRED**



Pre-primed and smooth surface. Ensure that surface is clean, dry and clean from grease, oil and other contamination. Theoretical coverage and specific gravity is colour dependant




Thoroughly clean surface. Remove all defective or poorly adhering material by rubbing down using a suitable abrasive paper and dust off.

**SAFETY & ENVIRONMENTAL NOTES**

Keep away from ignition sources because it is flammable. You must wear eye protection while applying paint. Always keep container air tight close. It must be kept out of children's reach. In case of contact with eyes, wash with brimful cup of water and immediately approach doctor. Always manage container to keep it in upright position. Protect it from extreme temperatures. Please do not empty into drain and water sources. Use of mask is advisable while rubbing down and same is true when applying by spray never breath vapor / spray. In case ventilation is insufficient the use of proper respiratory equipment is advised.

**SPREADING RATE**

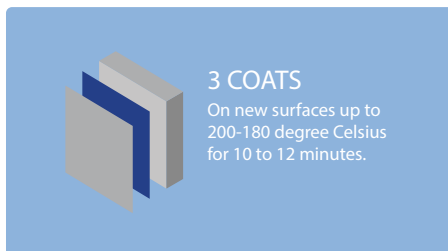

**DISCLAIMER**

The technical and application properties contained in this data sheet were determined by the product chemistry. The actual results may vary with the colour and gloss level of each product.