

POWDER COATING

MASTER POLYESTER POWDER COATING

Best for adding longevity.



PRODUCT BENEFITS



WIDE RANGE




EXCELLENT GLOSS



CHEMICAL RESISTANT




EXTERIOR DURABILITY



VOCs FREE


PRODUCT FEATURES

WASHABILITY



✓ BEST IN CLASS
HIGH
MEDIUM
LOW

FINISH

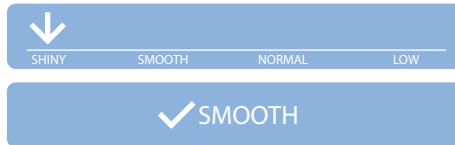

AVAILABLE PACKS



20 KG

TECHNICAL INFORMATION

- Gloss
20 to 95 @ 60°
- Colour
No Restrictions
- Relative Humidity
60%
- Drying Time
10 min
- Pencil Hardness Test
H – 2H Pencil
- Adhesion
Cross-cut rating Gt0
- Resistance to neutral salt spray
No Blistering
- Temperature
200 °C

PREPARATION REQUIRED




Pre-primed and smooth surface. Ensure that surface is clean, dry and clean from grease, oil and other contamination. Theoretical coverage and specific gravity is colour dependant



Thoroughly clean surface. Remove all defective or poorly adhering material by rubbing down using a suitable abrasive paper and dust off.

SPREADING RATE

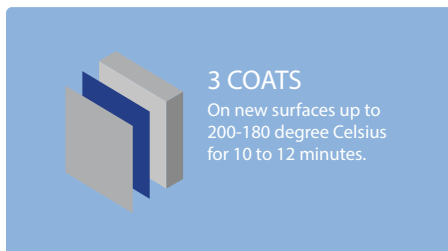

SAFETY & ENVIRONMENTAL NOTES

Keep away from ignition sources because it is flammable. You must wear eye protection while applying paint. Always keep container air tight close. It must be kept out of children's reach. In case of contact with eyes, wash with brimful cup of water and immediately approach doctor. Always manage container to keep it in upright position. Protect it from extreme temperatures. Please do not empty into drain and water sources. Use of mask is advisable while rubbing down and same is true when applying by spray never breath vapor / spray. In case ventilation is insufficient the use of proper respiratory equipment is advised.

DISCLAIMER

The technical and application properties contained in this data sheet were determined by the product chemistry. The actual results may vary with the colour and gloss level of each product.