

# MASTER ROYAL MATT EMULSION

Master Royal Matt Emulsion is an exclusive high quality water based matt emulsion, odorless and low VOC with a soft matt finish. It is suitable for all interior masonry surface including brickwork, plaster cement rendering and wall boards.



## PRODUCT BENEFITS



ROLLER APPLICATION



RICH MATT FINISH



EXCEPTIONAL COVERAGE



STAIN REPELLENT



CLOSE TO ZERO VOC


## PRODUCT FEATURES

### WASHABILITY



✓ BEST IN CLASS  
HIGH  
MEDIUM  
LOW

### AVAILABLE PACKS

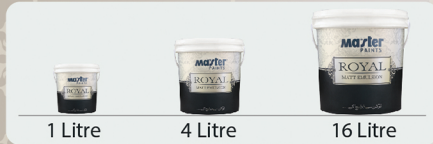

### TYPICAL SURFACES



Surface must be clean, dry and free from efflorescent salts. After priming with Master Water based Primer, fill and smooth the surface with Master Wall Putty.



Remove all defective or poorly adhering material by rubbing down using a suitable abrasive paper and dust off. Spot prime and fill surface as described.



Make good minor defects. For large holes and cracks use sand and cement mixture. Allow to dry. Prime surface and then fill any surface imperfection with the filler described above. Allow to dry. Scuff surface using abrasive paper and dust off.

### COLOURS AVAILABLE

30+

Factory Made Direct Shades

\*Light & Pastel shades can be tinted from the Master Paints Colour World outlets



### FINISH



MATT    LOW SHEEN    HIGH SHEEN    HIGH GLOSS

✓ SMOOTH

### TECHNICAL INFORMATION

#### ● Coverage

12-14 m / liter / coat

#### ● Application

Roller

#### ● Solvent

Clean Water

#### ● No of coats

2-3

#### ● Drying Time

2-3 hours between coats

#### ● Thinning

By Roller 20-30% / By Spray 30-40%

#### ● Cleaning

Clean all equipment with water

### SPREADING RATE



#### 1 COAT

On previously painted surfaces to get the one coat hiding up to 100sqft per liter/ per coat



#### 2 COATS

On new surfaces up to 100 sq.ft per liter by two coats

### PREPARATION REQUIRED

- New surfaces.
- Previously painted surfaces.
- Powdery dusty surfaces. (With cracks and other surface defects)

### SAFETY & ENVIRONMENTAL NOTES

Keep away from ignition sources because it is flammable. You must wear eye protection while applying paint. Always keep container air tight close. It must be kept out of children's reach. In case of contact with eyes, wash with brimful cup of water and immediately approach doctor. Always manage container to keep it in upright position. Protect it from extreme temperatures. Please do not empty into drain and water sources. Use of mask is advisable while rubbing down and same is true when applying by spray never breath vapor / spray. In case ventilation is insufficient the use of proper respiratory equipment is advised.

**STIR THOROUGHLY BEFORE USE.**