

SILKY WALL PUTTY

Master Wall Putty water based is a marvelous quality filler. It is 100% acrylic based and used for all interior masonry surfaces such as brick work, plaster and cement rendering.

PRODUCT BENEFITS



SILKY FINISH



ANTI-FUNGAL



EXTRA COVERAGE




ENVIRONMENT FRIENDLY



PRODUCT FEATURES

WASHABILITY




✓ BEST IN CLASS
HIGH
MEDIUM
LOW

FINISH



SPREADING RATE

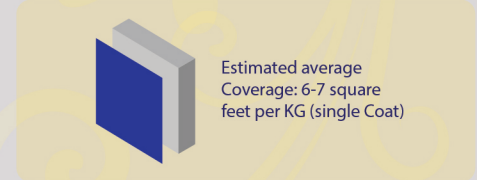

PREPARATION REQUIRED



Surface must be clean, dry and free from efflorescent salts. After priming with Master Wall Primer, fill and smooth the surface with Master Wall Putty.



Thoroughly clean surface. Remove all defective or poorly adhering material by rubbing down using a suitable abrasive paper and dust off. Prime with Master Wall Sealer and prepare the base with Master Wall Putty where needed.

AVAILABLE PACKS



TECHNICAL INFORMATION

- Coverage
 - 6-7 m² / kg / coat
- Application
 - Putty Applicator
- Thinner
 - Clean Water
- Drying Time
 - 2-3 hours between coats
- Cleaning
 - Clean all equipment with Water
- Thinning
 - Ready to use

TYPICAL SURFACES

- New surfaces.
- Previously painted surfaces.
- Powdery dusty surfaces. (With cracks and other surface defects)

SAFETY & ENVIRONMENTAL NOTES

Keep away from ignition sources because it is flammable. You must wear eye protection while applying paint. Always keep container air tight close. It must be kept out of children's reach. In case of contact with eyes, wash with brimful cup of water and immediately approach doctor. Always manage container to keep it in upright position. Protect it from extreme temperatures. Please do not empty into drain and water sources. Use of mask is advisable while rubbing down and same is true when applying by spray never breath vapor / spray. In case ventilation is insufficient the use of proper respiratory equipment is advised. **STIR THOROUGHLY BEFORE USE.**