


## ROYAL PEARL EMULSION

### Material Safety Data Sheet

High quality acrylic based water based Pearl finish. It also includes some luxurious colors with pearl effect.

**Research and Development Department**  
**Master Paint Industries (Pvt.) Ltd.**  
**Phone : 0 4 2 – 111 – 333 – 465,**  
**E-Mail : [info@masterpaints.com](mailto:info@masterpaints.com)**

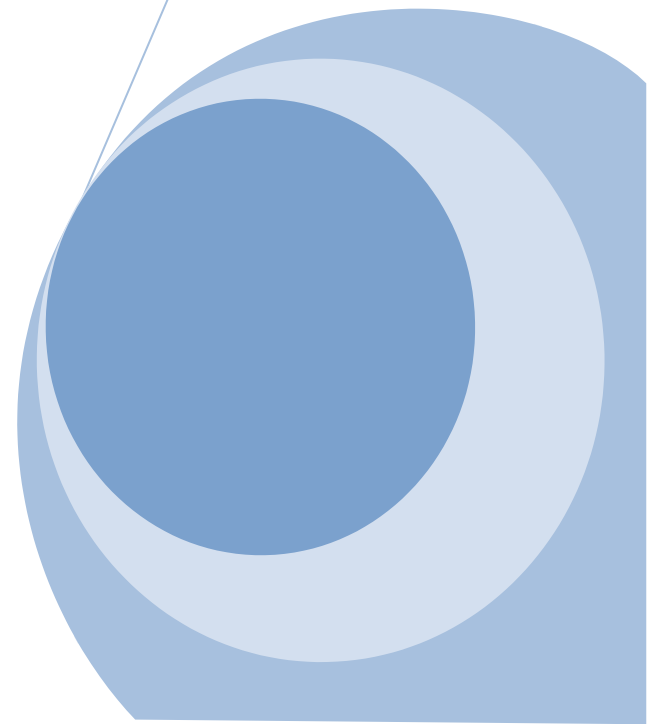

**PRODUCT INFORMATION**

Description: High quality acrylic based water based Pearl finish. It also includes some luxurious colors with pearl effect.

**TECHNICAL INFORMATION:**

Colour	Standard colour range.
Finish	Matt
Generic Type	Acrylic Emulsion
Vol Solid	40 % $\pm$ 2
Spreading Rate	16 m <sup>2</sup> / L. @25 $\mu$ m dft.
Drying Time	1-2 hrs at 30 °C.
Recoating Time	3 – 4 hrs.
Thinner / cleaner	Clean water
Weight / Litre	1.2 – 1.30 .
Flash Point	None
Further coat	Coat on coat.
Packing size	4 and 16 litres.

**APPLICATION DETAIL :**

Roller, conventional or airless spray. Thin with clean water.

**TYPICAL SURFACES :**

All loose material including loose paint should be thoroughly removed. Ensure surface is dry, clean and free from contaminants. New plaster / concrete must be fully cured. Water based primer like, Arams Acrylic primer is recommended underneath.

### **SAFETY AND ENVIRONMENTAL NOTES:**

Ensure proper ventilation during application and drying of paint. Avoid inhalation of paint mist and vapours and skin contact. Spillage of paint on skin should immediately be removed with suitable cleanser soap and water. Eyes should be well flushed with water and immediate medical attention should be sought.

Self-Life of product is 03 year (Keep In shade) (Minimum requirement from PSQCA is 02 years.)

